


INDOOR LAN CABLE

FTP CAT 6A

CM-041-CPR

CPR CERTIFIED
CONSTRUCTION PRODUCTS REGULATION
CPR Regulation [EU] n° 305/2011

- Jacket **PVC**
- Core **COPPER**
- Category **6A**
- Type **FTP**
- Conductor **23 AWG**
- Length **305m**
- Tested up to **500MHz**

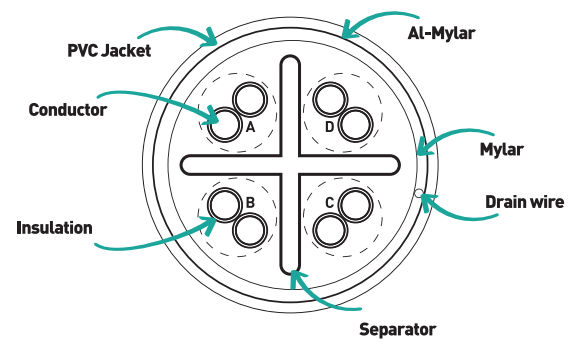

Conductor	
Conductor	Pure copper
Size	23 AWG

Insulation	
HDPE Dielectric Diameter	ø 1.1 ± 0.08mm
Material	HDPE

Jacket	
Jacket Diameter	7.2mm ± 0.2mm
Color	Light gray
Material	PVC
Jacket Thickness	0.6mm
Surface	Smooth

Technical Data	
Temperature & voltage rating	-20°C to 75°C / 300V
Conductor DC resistance	≤ 9.8Ω / 100m
Resistance unbalance	≤ 4%
Dielectric strenght	1.5 KV ac for 2s

Application	
Structure cabling for horizontal and building backbone cable	
Transmission of digital and analogue for data, video and audio applications	
IEEE 802.3an 10GBASE-T and Legacy speeds	

APPROVED
 ISO/IEC 11801
 EIA/TIA 568 C 2