

LAN CABLE U/UTP CAT 5e

CM-003-CPR

CPR CERTIFIED
CONSTRUCTION PRODUCTS REGULATION
CPR Regulation [EU] n° 305/2011

Jacket
PVC


Core
COPPER

Category
5e

Type
U/UTP

Conductor
28 AWG

Length
305m

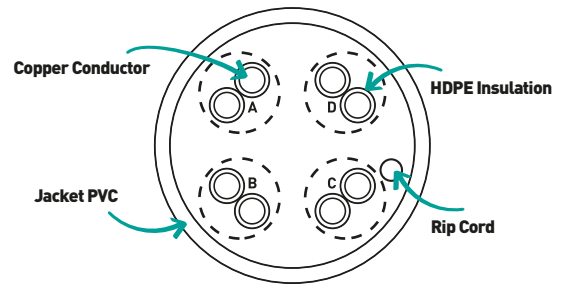

Conductor

Configuration 4pair 2 x 0.4mm ± 0.02

Material Copper

Work Datapss 140m

Insulation

Material HDPE

PE OD $\varnothing 0.86 \pm 0.05\text{mm}$

Paired Pitch

Blue / Blue & White 12mm

Orange / Orange & White 16mm

Green / Green & White 14mm

Brown / Brown & White 18mm

Other

Rid Cord Nylon

Package 305m / Box

Jacket

Material PVC

Color Grey

PVC OD 4.7mm ± 0.2mm

PVC Thickness 0.51 ± 0.03mm

Serface Smooth

Performance

Conductor Resistance $\Omega / 100\text{m}$. 20 °C $\leq 14.5\Omega$

Conductor Allow Load Current(A) 0.5A

Voltage Rating(V) $\leq 30\text{V}$

Operating Temperature (°C) -25°C to 70°C